

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	350mA LED	1	-	6	W
Input Current(Iin)	25°C,Nominal Input@230VAC	-	85	-	mA
Output Voltage(Vout)		3	-	19	Vdc
Output Current(Iout)	25°C,Nominal Input	332	350	367	mA
Power Factor	Full Load	-	0.45	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type High Power LED 1.2W x 1~5

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

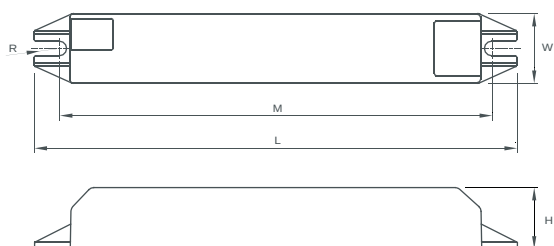

L : 145.5 mm H : 18 mm
 M : 130.3 mm K :
 N : R : 2.2 mm
 W : 21 mm Slot On One Side Allowing Alignment : M+/-3 mm
 Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1\text{ mm}$
 Terminal Block : PRI : Push Button
 SEC : Quick Connector and Push Button
 Housing Material : Polycarbonate
 Soldering : Lead - Free, Comply With RoHS
 Label : Surface Print

Wiring Diagram

