

100V-120V AC



Approval Marks



Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		-	100-120	-	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	350mA LED	-	6-12	-	W
Input Current(Iin)	25 °C, Nominal Input@120VAC	-	145	-	mA
Output Voltage(Vout)		-	18-36	-	Vdc
Output Current(Iout)	25 °C, Nominal Input	315	350	375	mA
Power Factor	Full Load	-	0.95	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+75	°C


Lamp Type High Power LED 1.2W x 5~10

Application Space

Indoor Use , Class 2 Power Unit
(Low Humidity, No Condensation)

Physical

Parameter

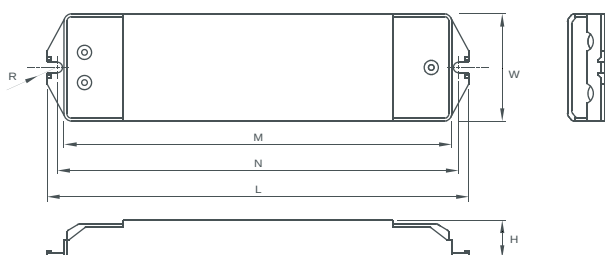

L : 178 mm H : 16 mm
 M : 164 mm K :
 N : 169.8 mm R : 2.25 mm
 W : 45.4 mm Slot On One Side Allowing Alignment : M+/-3 mm
 Tolerance : $\geq 0 \sim 100 \geq +/0.5\text{mm}$
 $100 \geq +/1 \text{ mm}$
 Terminal Block : Input : Screw Type
 Output : Screw Type and Quick Connector
 Housing Material : Polycarbonate
 Soldering : Lead - Free, Comply With RoHS
 Label : Surface Print

Wiring Diagram

