

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	700mA LED	3	-	6	W
Input Current(Lin)	25 °C,Nominal Input@230VAC	-	95	-	mA
Output Voltage(Vout)		4	-	10	Vdc
Output Current(Iout)	25 °C,Nominal Input	630	700	770	mA
Power Factor	Full Load		0.40		
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C

Lamp Type High Power LED 3W x 1~2
5W x 1



Application Space

Indoor / Outdoor Use
(Low Humidity, No Condensation)

Physical

Wiring Diagram

Parameter

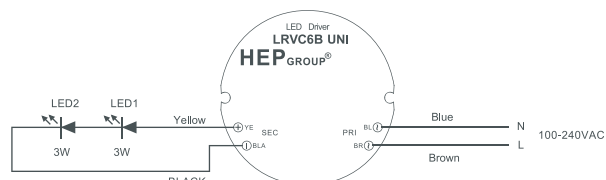

L : 55 mm H : 22 mm
M : 52 mm K : mm
N : mm R : mm
W: mm Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1\text{ mm}$

Terminal Block : Hard Wires : PRI : Blue / Brown 149mm AWG#18
SEC : Yellow / Black 190mm AWG#22

Housing Material : Polycarbonate / Potting

Soldering : Lead-Free, Comply With RoHS

Label : Surface Print