

100V-240V AC



Approval Marks



Certified

EN 61347-1::2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	Regular LED	0	-	6	W
Input Current(Iin)	25°C, Nominal Input@230VAC	-	90	-	mA
Output Voltage(Vout)		11.4	12	12.6	Vdc
Output Current(Iout)	25°C, Nominal Input	-	-	500	mA
Power Factor	Full Load	-	0.4	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type Regular LED 0.04~0.1W

Application Space

Indoor/Outdoor Use
(Low Humidity, No Condensation)

Physical

Parameter

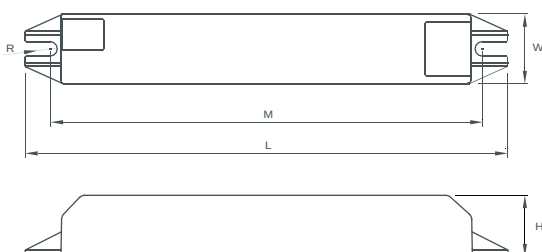

L : 145.5 mm H : 18 mm
M : 130.3 mm K :
N : R : 2.2 mm
W : 21 mm Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1\text{ mm}$

Terminal Block : PRI : Push Button
SEC : Push Button

Housing Material : Polycarbonate

Soldering : Lead - Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

