

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
 EN 61347-2-13:2006
 EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power (Pout)	Regular LED	0	-	3	W
Input Current (Iin)	25°C, Nominal Input@230VAC	-	40	-	mA
Output Voltage(Vout)		11.88	12	12.12	Vdc
Output Current (Iout)	25°C, Nominal Input	-	-	250	mA
Power Factor	Full Load	-	0.40	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type Regular LED 0.04~0.1W

Application Space

Indoor Use
 (Low Humidity, No Condensation)

Physical

Parameter

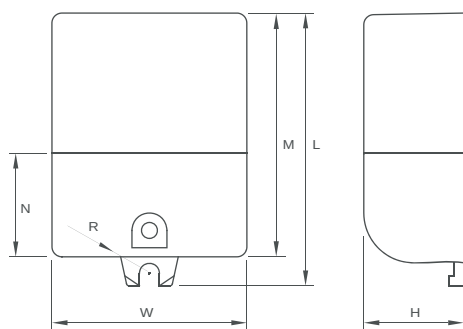

L : 54.6 mm H : 20 mm
 M : 48.8 mm K : mm
 N : 21.8 mm R : 2 mm
 W : 39 mm

Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1\text{ mm}$

Terminal Block : PRI : Screw Type
 SEC : Screw Type

Housing Material : Polycarbonate

Soldering : Lead-Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

